

# Midwest Driveshaft

Phone: 630-513-9292


Heavy Equipment Form

Fax 630-513-9387

## Step 1 Full Round or Half round?


Step 2 Measure to Center of yoke hole/center of ujoint to center of hanger slot

Then measure center of hanger slot to center of rear diff yoke/ujoint

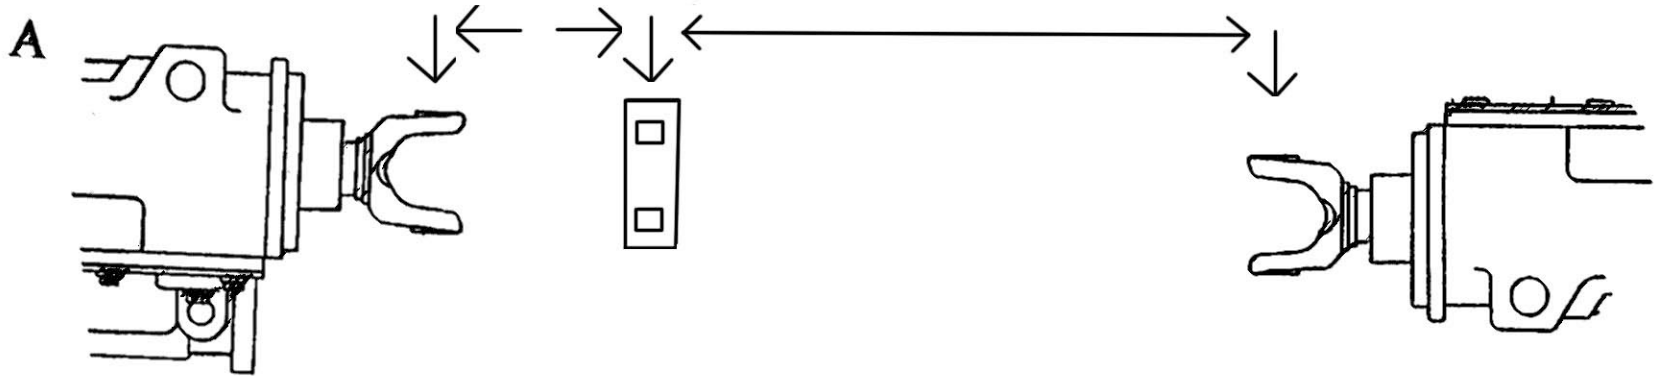

Step 3 Measure distance between the Trans and the first Differential.

Step 4 Measure between both differentials.

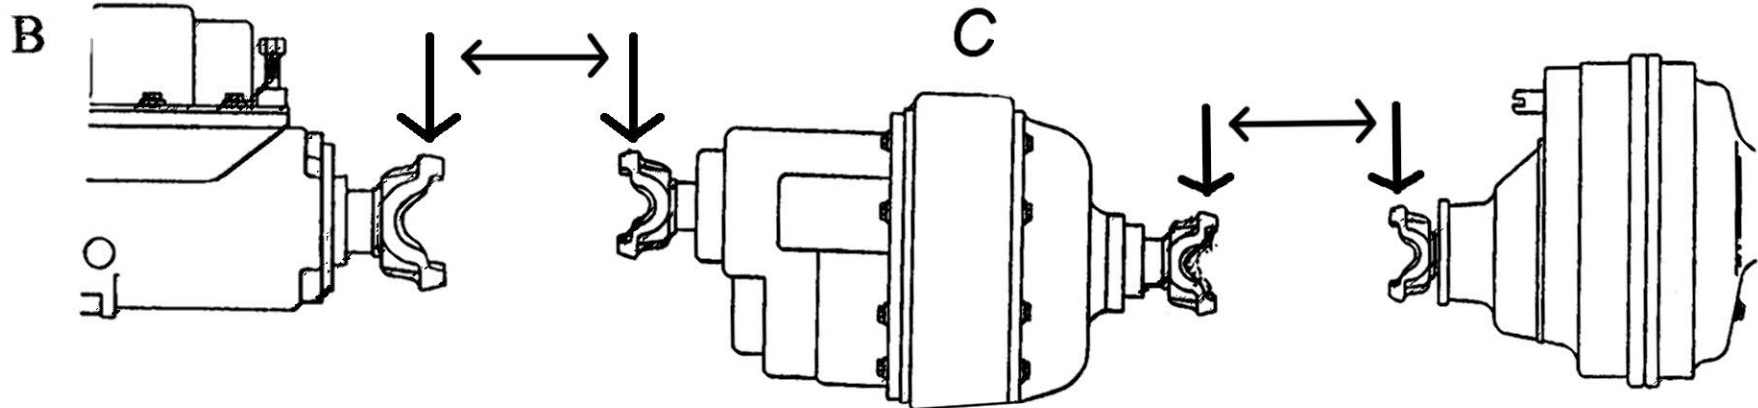

If Half Round with hangers measure from center of 1st Ujoint to center of hanger. Then center of midship bracket to center of 1st diff